


USHIO



CHARACTERISTICS & SPECIFICATIONS

TRIPLE TUBE


Average Life: 10,000 hours • CRI: 82



(5) 2-Pin Base



(6) 4-Pin Base

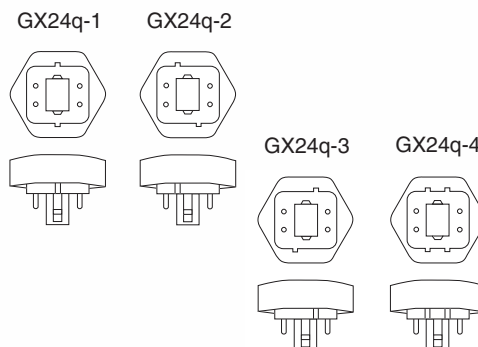

Watts (W)	Ushio Ordering Code	Ushio Lamp Description	Volts (V)	Current (A)	Luminous Flux		Color Temp (K)	Dimensions		Base
					Nom. (lm)	Min. (lm)		MOL (mm)	MOL (in)	
Triple Tube 2-Pin Base (5)										
18	3000199	CF18T/827	100	0.220	1200	1080	2700	123	4.8	GX24d-2
18	3000201	CF18T/835	100	0.220	1200	1080	3500	123	4.8	GX24d-2
18	3000200	CF18T/841	100	0.220	1200	1080	4100	123	4.8	GX24d-2
26	3000203	CF26T/827	105	0.325	1800	1620	2700	138	5.4	GX24d-3
26	3000205	CF26T/835	105	0.325	1800	1620	3500	138	5.4	GX24d-3
26	3000204	CF26T/841	105	0.325	1800	1620	4100	138	5.4	GX24d-3
Triple Tube 4-Pin Base for Electronic Ballasts (6)—Dimmable										
13	3000207	CF13TE/827	91	0.175	900	810	2700	108	4.4	GX24q-1
13	3000209	CF13TE/835	91	0.175	900	810	3500	108	4.4	GX24q-1
13	3000208	CF13TE/841	91	0.175	900	810	4100	108	4.4	GX24q-1
18	3000211	CF18TE/827	100	0.220	1200	1080	2700	116	4.6	GX24q-2
18	3000255	CF18TE/830	100	0.220	1200	1080	3000	116	4.6	GX24q-2
18	3000213	CF18TE/835	100	0.220	1200	1080	3500	116	4.6	GX24q-2
18	3000212	CF18TE/841	100	0.220	1200	1080	4100	116	4.6	GX24q-2
18	3000214	CF18TE/865	100	0.220	1140	1025	6500	116	4.6	GX24q-2
26	3000215	CF26TE/827	105	0.325	1800	1620	2700	131	5.2	GX24q-3
26	3000254	CF26TE/830	105	0.325	1800	1620	3000	131	5.2	GX24q-3
26	3000217	CF26TE/835	105	0.325	1800	1620	3500	131	5.2	GX24q-3
26	3000216	CF26TE/841	105	0.325	1800	1620	4100	131	5.2	GX24q-3
26	3000218	CF26TE/865	105	0.325	1710	1540	6500	131	5.2	GX24q-3
32	3000219	CF32TE/827	100	0.320	2400	2160	2700	147	5.8	GX24q-3
32	3000252	CF32TE/830	100	0.320	2400	2160	3000	147	5.8	GX24q-3
32	3000221	CF32TE/835	100	0.320	2400	2160	3500	147	5.8	GX24q-3
32	3000220	CF32TE/841	100	0.320	2400	2160	4100	147	5.8	GX24q-3
32	3000222	CF32TE/865	100	0.320	2280	2052	6500	147	5.8	GX24q-3
42	3000223	CF42TE/827	135	0.320	3200	2880	2700	168	6.7	GX24q-4
42	3000253	CF42TE/830	135	0.320	3200	2800	3000	168	6.7	CX24q-4
42	3000225	CF42TE/835	135	0.320	3200	2880	3500	168	6.7	GX24q-4
42	3000224	CF42TE/841	135	0.320	3200	2880	4100	168	6.7	GX24q-4
42	3000226	CF42TE/865	135	0.320	3040	2740	6500	168	6.7	GX24q-4

Form No. S-CFL/R-1211

The specifications on this sheet supercede all previously published specifications and may be subject to change for design and specification improvement without prior notice.

© 2011 USHIO America, Inc. All rights reserved.

Scan with a smartphone
to view this product online.

