


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

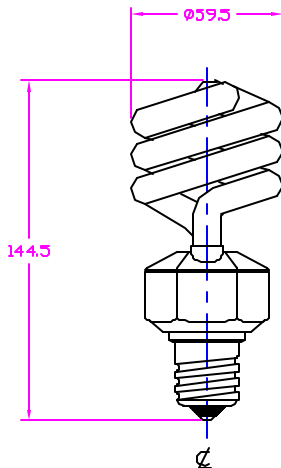

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	23 W
AMPERAGE	0.19 A
COLOR TEMP	2700 K
CRI	85
LUMENS	1550 Lm
BASE TYPE	E26
AVERAGE LIFE	10000 HRS

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
<b>LIST OF MATERIALS</b>					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		<b>USHIO AMERICA, INC.</b> 10550 Camden Dr. Cypress, CA 90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS			
ANGLES DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DATE		TITLE	
MATERIAL		DRAWN			
COMPOSITE		ENGR		UFL-CF23CLT/E26 COMPACT FLUORESCENT LAMP	
		DATE			
FINISH		MATERIAL		SIZE	
APPLICATION		DRAWN ACTVY		CODE IDENT NOS	
		ENGR ACTVY		3000157	
		SCALE		WEIGHT	
		NONE		SHEET 1 OF 1	

4

3

1

4

3

2

1

CAD