


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

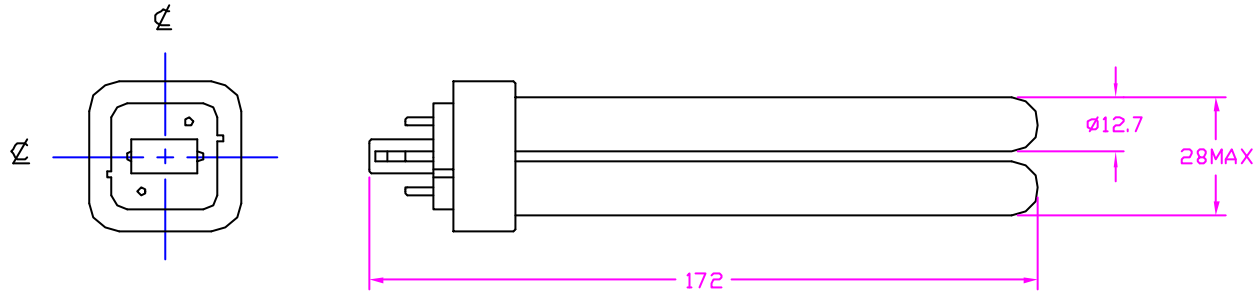

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	105 V
WATTAGE	26 W
CURRENT	0.325 A
CDLOR TEMP	4100 K
CRI	82
LUMENS	1800 Lm
ANSI SHAPE	T-4 DOUBLE TUBE
BASE TYPE	CAP TYPE-G24d-3
Ave. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630 TITLE UFL-CF26D/841 COMPACT FLUORESCENT	
MATERIAL COMPOSITE		APPROVALS			
FINISH		DATE			
		DRAWN R.AMPARO 04/05/01			
		CHKD J.COOPER 04/05/01		SIZE B	
		ENGR		CODE IDENT NO.	
		MFG		DWG NO. 3000142	
		QUAL		SCALE NONE	
		DSGN ACTVY		WEIGHT	
		GOVT ACTVY		SHEET 1 OF 1	

4

3

1

D

D

C

C

B

B

A

A

4

3

2

1

CAD