


# USHIO



## CHARACTERISTICS & SPECIFICATIONS

### TRIPLE TUBE


Average Life: 10,000 hours • CRI: 82



(5) 2-Pin Base

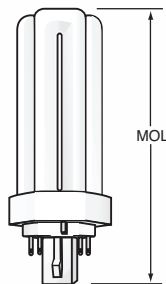

(6) 4-Pin Base

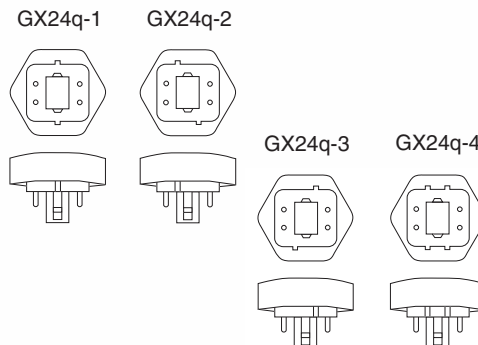

| Watts<br>(W)                                                | Ushio<br>Ordering<br>Code | Ushio<br>Lamp Description | Volts<br>(V) | Current<br>(A) | Luminous Flux |              | Color<br>Temp<br>(K) | Dimensions  |             | Base    |
|-------------------------------------------------------------|---------------------------|---------------------------|--------------|----------------|---------------|--------------|----------------------|-------------|-------------|---------|
|                                                             |                           |                           |              |                | Nom.<br>(lm)  | Min.<br>(lm) |                      | MOL<br>(mm) | MOL<br>(in) |         |
| Triple Tube 2-Pin Base (5)                                  |                           |                           |              |                |               |              |                      |             |             |         |
| 18                                                          | 3000199                   | CF18T/827                 | 100          | 0.220          | 1200          | 1080         | 2700                 | 123         | 4.8         | GX24d-2 |
| 18                                                          | 3000201                   | CF18T/835                 | 100          | 0.220          | 1200          | 1080         | 3500                 | 123         | 4.8         | GX24d-2 |
| 18                                                          | 3000200                   | CF18T/841                 | 100          | 0.220          | 1200          | 1080         | 4100                 | 123         | 4.8         | GX24d-2 |
| 26                                                          | 3000203                   | CF26T/827                 | 105          | 0.325          | 1800          | 1620         | 2700                 | 138         | 5.4         | GX24d-3 |
| 26                                                          | 3000205                   | CF26T/835                 | 105          | 0.325          | 1800          | 1620         | 3500                 | 138         | 5.4         | GX24d-3 |
| 26                                                          | 3000204                   | CF26T/841                 | 105          | 0.325          | 1800          | 1620         | 4100                 | 138         | 5.4         | GX24d-3 |
| Triple Tube 4-Pin Base for Electronic Ballasts (6)—Dimmable |                           |                           |              |                |               |              |                      |             |             |         |
| 13                                                          | 3000207                   | CF13TE/827                | 91           | 0.175          | 900           | 810          | 2700                 | 108         | 4.4         | GX24q-1 |
| 13                                                          | 3000209                   | CF13TE/835                | 91           | 0.175          | 900           | 810          | 3500                 | 108         | 4.4         | GX24q-1 |
| 13                                                          | 3000208                   | CF13TE/841                | 91           | 0.175          | 900           | 810          | 4100                 | 108         | 4.4         | GX24q-1 |
| 18                                                          | 3000211                   | CF18TE/827                | 100          | 0.220          | 1200          | 1080         | 2700                 | 116         | 4.6         | GX24q-2 |
| 18                                                          | 3000255                   | CF18TE/830                | 100          | 0.220          | 1200          | 1080         | 3000                 | 116         | 4.6         | GX24q-2 |
| 18                                                          | 3000213                   | CF18TE/835                | 100          | 0.220          | 1200          | 1080         | 3500                 | 116         | 4.6         | GX24q-2 |
| 18                                                          | 3000212                   | CF18TE/841                | 100          | 0.220          | 1200          | 1080         | 4100                 | 116         | 4.6         | GX24q-2 |
| 18                                                          | 3000214                   | CF18TE/865                | 100          | 0.220          | 1140          | 1025         | 6500                 | 116         | 4.6         | GX24q-2 |
| 26                                                          | 3000215                   | CF26TE/827                | 105          | 0.325          | 1800          | 1620         | 2700                 | 131         | 5.2         | GX24q-3 |
| 26                                                          | 3000254                   | CF26TE/830                | 105          | 0.325          | 1800          | 1620         | 3000                 | 131         | 5.2         | GX24q-3 |
| 26                                                          | 3000217                   | CF26TE/835                | 105          | 0.325          | 1800          | 1620         | 3500                 | 131         | 5.2         | GX24q-3 |
| 26                                                          | 3000216                   | CF26TE/841                | 105          | 0.325          | 1800          | 1620         | 4100                 | 131         | 5.2         | GX24q-3 |
| 26                                                          | 3000218                   | CF26TE/865                | 105          | 0.325          | 1710          | 1540         | 6500                 | 131         | 5.2         | GX24q-3 |
| 32                                                          | 3000219                   | CF32TE/827                | 100          | 0.320          | 2400          | 2160         | 2700                 | 147         | 5.8         | GX24q-3 |
| 32                                                          | 3000252                   | CF32TE/830                | 100          | 0.320          | 2400          | 2160         | 3000                 | 147         | 5.8         | GX24q-3 |
| 32                                                          | 3000221                   | CF32TE/835                | 100          | 0.320          | 2400          | 2160         | 3500                 | 147         | 5.8         | GX24q-3 |
| 32                                                          | 3000220                   | CF32TE/841                | 100          | 0.320          | 2400          | 2160         | 4100                 | 147         | 5.8         | GX24q-3 |
| 32                                                          | 3000222                   | CF32TE/865                | 100          | 0.320          | 2280          | 2052         | 6500                 | 147         | 5.8         | GX24q-3 |
| 42                                                          | 3000223                   | CF42TE/827                | 135          | 0.320          | 3200          | 2880         | 2700                 | 168         | 6.7         | GX24q-4 |
| 42                                                          | 3000253                   | CF42TE/830                | 135          | 0.320          | 3200          | 2800         | 3000                 | 168         | 6.7         | CX24q-4 |
| 42                                                          | 3000225                   | CF42TE/835                | 135          | 0.320          | 3200          | 2880         | 3500                 | 168         | 6.7         | GX24q-4 |
| 42                                                          | 3000224                   | CF42TE/841                | 135          | 0.320          | 3200          | 2880         | 4100                 | 168         | 6.7         | GX24q-4 |
| 42                                                          | 3000226                   | CF42TE/865                | 135          | 0.320          | 3040          | 2740         | 6500                 | 168         | 6.7         | GX24q-4 |

Form No. S-CFL/R-1211

The specifications on this sheet supercede all previously published specifications and may be subject to change for design and specification improvement without prior notice.

© 2011 USHIO America, Inc. All rights reserved.

Scan with a smartphone  
to view this product online.

