


Model No.	VE454MVHRP
Family	Elite
Ballast Type	Electronic
Lamp Operation	Parallel-Serial
Input Voltage	120/277V
Starting Method	Program Start

PRODUCT SPECIFICATION

ELECTRONIC BALLASTS

Lamp Type	No. of Lamps	Input Voltage (V)	Input Current (A)	Input Power (W)	Power Factor	MAX THD (%)	Ballast Factor	Min. Starting Temp.(F/C)	Lamp Current Crest Factor	B.E.F.
FT36W 36/39W	3	120/277	1.09/0.49	135/133	0.98	10	1.20	-20	1.7	
FT36W 36/39W	4	120/277	1.42/0.62	178/174	0.98	10	1.18	-20	1.7	
FT50W 50W	3	120/277	1.51/0.65	179/176	0.98	10	1.15	-20	1.7	
FT50W 50W	4	120/277	1.98/0.84	236/230	0.98	10	1.12	-20	1.7	
FT55W 55W	3	120/277	1.54/0.62	170/167	0.98	10	0.93	-20	1.7	
FT55W 55W	4	120/277	1.88/0.80	224/218	0.98	10	0.91	-20	1.7	
FC12T5HO	3	120/277	1.32/0.57	161/158	0.98	10	0.88	-20	1.7	
FC12T5HO	4	120/277	1.74/0.74	212/206	0.98	10	0.86	-20	1.7	
F54T5HO 54W	3	120/277	1.52/0.66	182/179	0.98	10	1.03	-20	1.7	
F54T5HO 54W	4	120/277	2.00/0.86	240/234	0.98	10	1.00	-20	1.7	

Physical Parameters

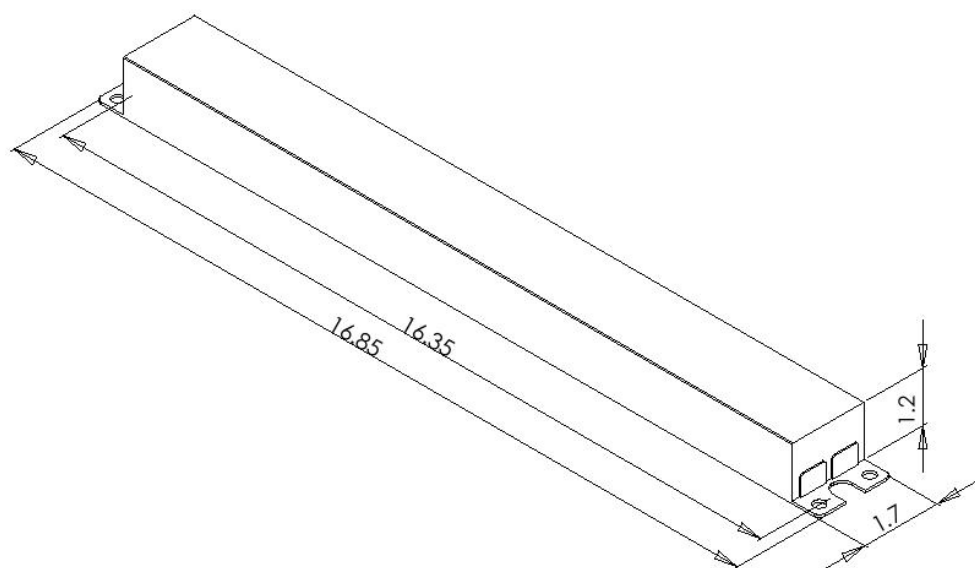

Enclosure (in)	Lead Length in.(+/-1.0)
Length 16.85	Black 12
Width 1.7	White 12
Height 1.2	Red 24
Mounting 16.35	Blue 24
	Yellow 36

Wiring Diagram

