

Field Adjustable Selectable Driver for Type-C LED's | Type C



TYPE - C


FEATURES AND BENEFITS




- 3-Level Selectable Drive Current (250/ 300-360mA)
- Universal Voltage (120 - 277V)
- Multiple Output Channels
- Constant Current
- Output Current 250mA/300mA/360mA
Selectable through Line Lead
- 0-10V Dimmable
- Integrates with Adaptive Lightning Control Systems
- Compatible with LED modules and Coretech LED tubes
- UL, cUL, UL8750 Class 2
- FCC Part 15 Class A

- 3-Level Selectable Drive Current (250/ 300-360mA)
- Universal Voltage (120-277V)
- Multiple Output Channels
- Constant Current | 4 Channels
- Output Current 250mA/300mA/360mA
- Selectable through Line Lead
- 0-10V Dimmable
- Integrates with Adaptive Lightning Control Systems
- Compatible with LED modules and Coretech LED tubes
- UL, cUL, UL8750 Class 2
- FCC Part 15 Class A

2 LAMP WIRING DIAGRAM

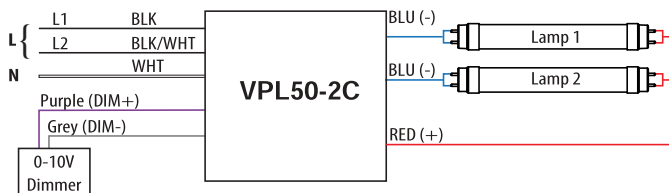

4 LAMP WIRING DIAGRAM

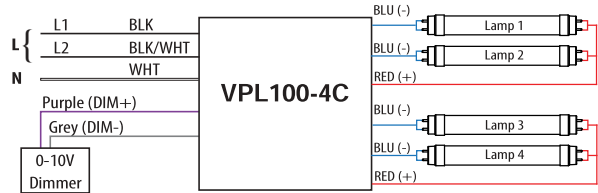

| Model No. | Output Current | Driver Type | Max Wattage (W) | No. of Channels | Input Voltage (V) | Dimming |
|-------------------------|------------------|------------------|-----------------|-----------------|-------------------|---------|
| Programmable LED Driver | | | | | | |
| VPL50-2C-025/030/036 | Field Adjustable | Constant Current | 36 | 2 | 120 - 277 | 0-10V |
| VPL100-4C-025/030/036 | Field Adjustable | Constant Current | 73 | 4 | 120 - 277 | 0-10V |

See espentech.com for CoreTech™ and VersaLinear™ specifications.