

**Presented By:** Candela Corporation  
**Contact Phone:** (800) 922-9226  
**Contact E-mail:** sales@candelacorp.com

**Customer Name:**  
**Project Name:**  
**Fixture Type:**






GE  
Lighting

### 18275 - 100A/RS 12PK-5

#### GE Rough Service Worklight A21 - Rough Service

- GE's specialty bulbs offer innovative solutions for a variety of lighting needs.
- The GE Rough Service Worklight is specially designed with rugged filaments and mounts to withstand rough handling and shock better than regular household bulbs.

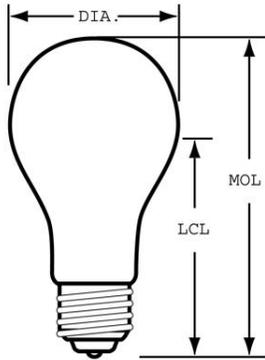

#### GENERAL CHARACTERISTICS

Lamp Type	Incandescent - A-line
Bulb	A21
Base	Medium Screw (E26)
Filament	C-17
Bulb Finish	Inside frost
Wattage	100
Voltage	120
Rated Life	1000 hrs
Bulb Material	Soft glass
Primary Application	Rough Service

#### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1160
Beam Spread - Vertical	35.0 - 50.0 °
Nominal Initial Lumens per Watt	11

#### DIMENSIONS

Maximum Overall Length (MOL)	5.25 cm
Bulb Diameter (DIA)	2.625 cm
Bulb Diameter (DIA) (MAX)	2.625 cm
Light Center Length (LCL)	3.81 cm

#### PRODUCT INFORMATION

Product Code	18275
Description	100A/RS 12PK-5
Standard Package	BUNDLE
Standard Package GTIN	00043168182751
Standard Package Quantity	60
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	60
UPC	043168904124

#### CAUTIONS & WARNINGS

##### Warning

- Unexpected lamp rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
- Risk of Fire
  - Keep combustible materials away from lamp.