

## SCREW-IN RETROFITS






# SHOE BOX & WALL PACK



includes ->  
support  
feet to  
prevent  
socket sag

- > 320W models replacing 1000W HID.
- > LED panel is adhered on lens within fixture.
- > Lens must be flat and made of glass.
- > Includes a fan and thermal sensor to run cool and ensure a long and bright life.
- > Enclosed fixture required.
- > Type V optic.
- > Available in 4000 and 5000K.
- > 3000K special order.
- > LED-8091: 120-277V  
(can be used on 208V & 240V).
- > LED-8091-HV: 277-480V  
(can be used on 347V).
- > "D" Models dim to 50% by selecting "LO" on the switch located on the top of the lamp only




PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	BASE
LED-8091M50	844006051150	up to 1000W HID	320W	44610	5000K	EX39
LED-8091M50D	844006077587	up to 1000W HID	320W	44610	5000K	EX39
LED-8091M50-HV	844006055417	up to 1000W HID	320W	44610	5000K	EX39
LED-8091M50D-HV	844006077594	up to 1000W HID	320W	44610	5000K	EX39





## SHOE BOX & WALL PACK

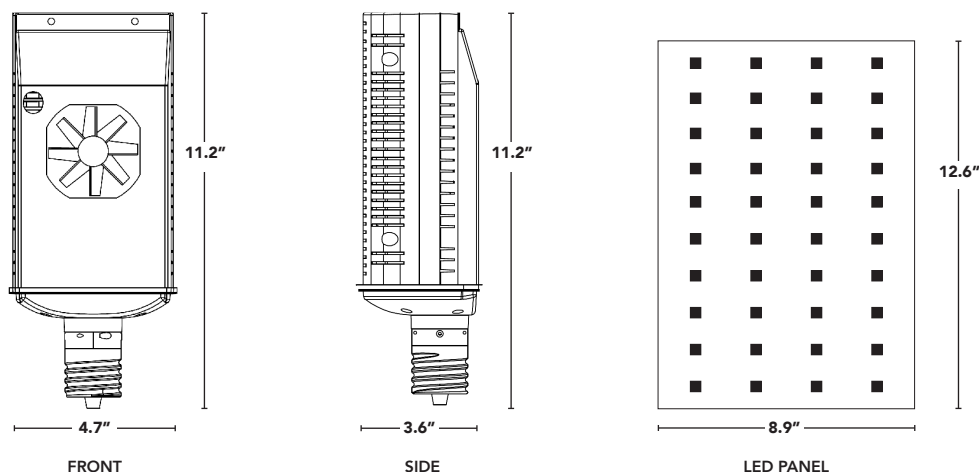

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DLC CODE
LED-8091M30	844006051112	up to 1000W HID	320W	43090	3000K*	EX39	N/A
LED-8091M40	844006051136	up to 1000W HID	320W	43380	4000K	EX39	N/A
LED-8091M50	844006051150	up to 1000W HID	320W	44610	5000K	EX39	N/A
LED-8091M30D	844006077556	up to 1000W HID	320W	43090	3000K*	EX39	S-IHEWFN
LED-8091M40D	844006077563	up to 1000W HID	320W	43380	4000K	EX39	S-38E4T9
LED-8091M50D	844006077587	up to 1000W HID	320W	44610	5000K	EX39	S-I0TZBH
LED-8091M30-HV	844006055370	up to 1000W HID	320W	43090	3000K*	EX39	N/A
LED-8091M40-HV	844006055394	up to 1000W HID	320W	43380	4000K	EX39	N/A
LED-8091M50-HV	844006055417	up to 1000W HID	320W	44610	5000K	EX39	N/A
LED-8091M40D-HV	844006077570	up to 1000W HID	320W	43380	4000K	EX39	S-24I3PX
LED-8091M50D-HV	844006077594	up to 1000W HID	320W	44610	5000K	EX39	S-BL4W5K

\* 3000K special order only