

# 100W Lighting Transformer



## Indoor & Outdoor Magnetic Lighting Transformer

Product Code: M100L12-277

Magnitude's M100L12-277 LED Driver is the perfect choice for use in hospitals, schools, and shopping malls or for any commercial application that 277V is present. The Drivers are encased in a high-quality NEMA 3R enclosure that includes 2 knock-outs to enable easy installation. It is equipped with a push to reset breaker on the output for load protection.

## Features

- Push-to-reset breaker
- ETL listed
- Certified to CSA Standard
- Commercial Use
- flicker-free
- Nema 3R enclosure
- Wiring compartment with 2 knock-outs for clean and easy installation.

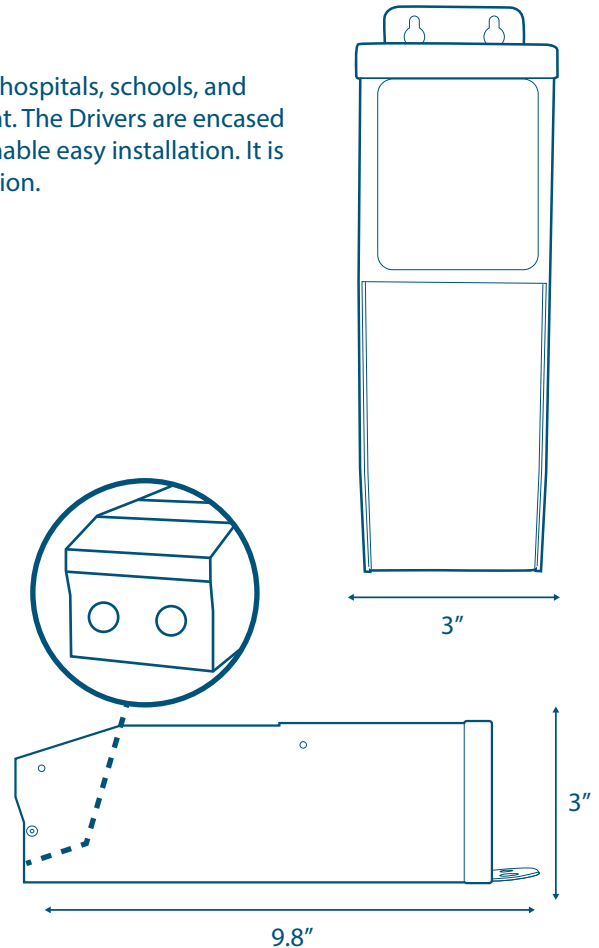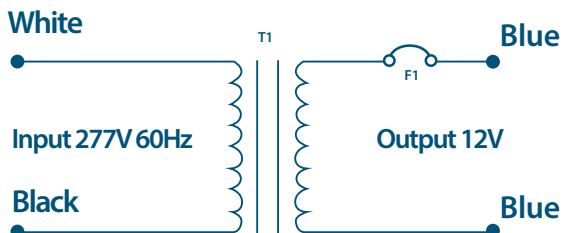

## Specifications

Max Load	100W
Input Voltage	277V AC
Input Current Full Load	0.838 A
Output Voltage Full Load	11.5V AC
Max Output Current Full Load	8.24A
Open Circuit Output Voltage	12.5V AC
Efficiency on I	92.3%
Coil Former	Double Section Bobbin
Max. Ambient Temperature	-30°C to 50°C
Min. Installation Space Between Drivers	5" Inch
Thermal Class	B130°C
Leads Primary	PVC 600V #20
Leads Secondary	PVC 300V #16
Circuit Breaker	secondary manual push-to-reset
Dimensions L*W*H	9.8 in. x 3 in. x 3 in (248.9 mm x 76.2 mm x 76.2 mm)
Weight	87 Oz.