

# 20W Lighting Transformer




## Indoor & Outdoor AC Magnetic Class 2 Lighting Transformer

Product Code: M20L12-AR

Magnitude's M20L12-AR is the most compact lighting transformer on the market with a magnetic transformer core. It is equipped with two auto-reset breakers, one on the input and one on the output, which protect both the load and transformer. The transformer is encased in a coated metal box that includes 2 knock-outs, one on each side, to enable easy installation that complies with electrical code requirements.

## Features

- Dimmable with any standard MLV TRIAC dimmer
- Two auto-reset circuit breakers
- ETL listed
- Certified to CSA Standard
- Class 2
- Commercial and Residential Use
- Nema 3R enclosure
- Wiring compartment with 2 knock-outs for clean and easy installation.

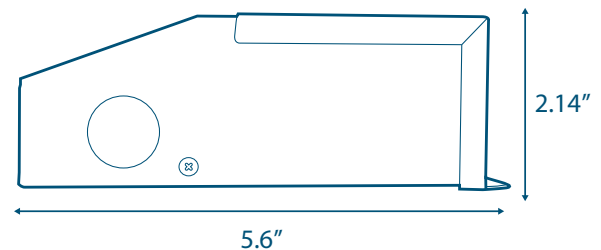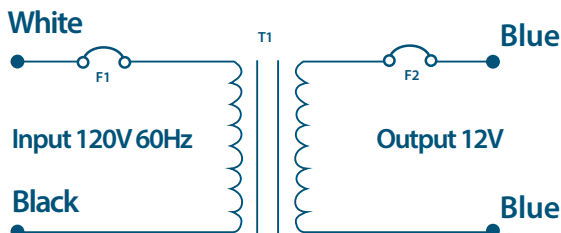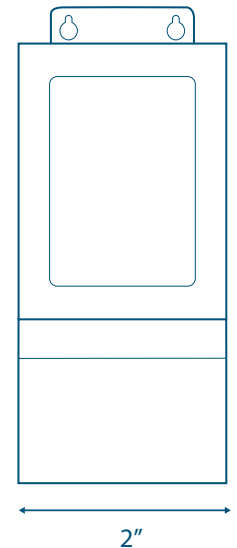

## Specifications

Max Load	20W
Input Voltage	120V AC
Input Current Full Load	0.195 A
Output Voltage Full Load	11.4V AC
Max Output Current Full Load	1.65A
Open Circuit Output Voltage	12.5V AC
Efficiency on I	89.8%
Coil Former	Double Section Bobbin
Max. Ambient Temperature	-30°C to 50°C
Min. Installation Space Between Drivers	5" Inch
Thermal Class	B130°C
Leads Primary	PVC 600V #20
Leads Secondary	PVC 300V #16
Circuit Breaker	primary and secondary auto reset
Dimensions L*W*H	5.6 in. x 2 in. x 2.14 in. (142.2mm x 50.8 mm x 54.3 mm)
Weight	35 Oz.

The specifications are subject to change without notice