



QUARTZ HALOGEN LAMPS • DOUBLE ENDED

J SERIES

- Only for use in Approved Enclosed Halogen Fixtures
- Depressed Single Contact Base - R7s-12
- Compact G8-8 & Linear G8-8 Filaments
- T4.5 x 12



Watts	Ushio Ordering Code	Ushio Lamp Code	Dimensions mm			Filament Type	Approx Lumens lm	Color Temp K	Avg Life h	Bulb Finish
			Dia (A)	OAL (B)	C-to-C (C)					
100	1000697	J120V-100W/119MM LONG	8.0	119.6	114.2	C-8	1450	2750	1500	Clear
100	1000761	J240V-100W/119MM LONG	8.0	119.6	114.2	C-8	1250	—	1500	Clear
150	1000700	J120V-150W/119MM LONG	8.0	119.6	114.2	C-8	2400	2800	1500	Clear
150	1000764	J240V-150W/119MM LONG	8.0	119.6	114.2	C-8	1950	2750	1500	Clear
200	1000702	J120V-200W/119MM LONG	8.0	119.6	114.2	C-8	2850	2900	2000	Clear
200	1000770	J240V-200W/119MM LONG	8.0	119.6	114.2	C-8	3200	2850	1500	Clear
300	1000777	J24V-300WG	8.0	119.6	114.2	C-8	5000	2900	1500	Clear
300	1000291	EHM, J120V-300W	8.0	119.6	114.2	C-8	5900	3000	2000	Clear
300	1000726	J130V-300W/119MM LONG	8.0	119.6	114.2	C-8	5900	—	2000	Clear
R7s-12, 119MM LONG										
500	1000488	FCL, J120V-500W	8.0	119.6	114.2	C-8	10000	3000	2000	Clear
500	1000224	DVS, J130V-500WB	8.0	119.6	114.2	C-8	10500	3000	2000	Clear
500	1000077	BSH, J240V-500WN	10.0	119.6	114.2	C-8	9500	2950	2000	Clear
R7s-12, 185.7MM LONG										
1000	1000695	J120V-1000WB*	12.0	191.1	185.7	C-8	22000	3000	2000	Clear
1000	1000258	DZX, J240V-1000WB	8.0	191.1	185.7	C-8	22000	3050	2000	Clear

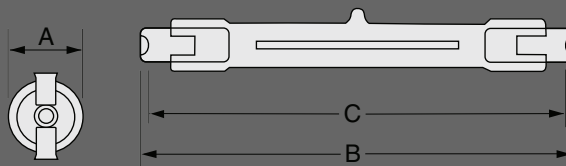

R7s-12