



Presented By: Candela Corporation
Contact Phone: 800-922-9226
Contact E-mail: sales@candelacor.com

Customer Name:
Project Name:
Fixture Type:

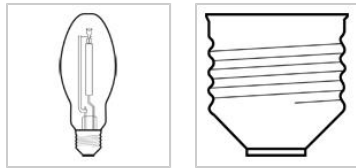

13252 - LU150/MED/ECO
 GE Lucalox® High Pressure Sodium B17

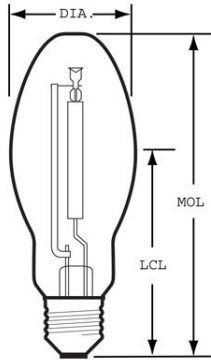

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.
 - Do not use lamp if outer glass is scratched or broken.
 - Wear safety glasses and gloves when handling lamp.

Warning

- Contains sodium – chemical burn risk
 - Avoid skin contact with broken pieces.
- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not store flammable materials near/below lamp.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Use only properly rated ballast.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium B17
Bulb	B17
Base	Medium Screw (E26)
Bulb Finish	Clear
Rated Life (MIN)	24000.0 h
Rated Life (NOM)	24000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
Mercury Content (NOM)	14.85 mg
Picograms of Mercury (NOM)	43.0 pg
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	16000.0
Mean Lumens (NOM)	14400.0
Nominal Initial Lumens per Watt (NOM)	106.6667
Color Temperature (NOM)	2000.0 K
Color Rendering Index (CRI) (NOM)	22.0
Effective Arc Length (NOM)	1.57 in

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	150.0
Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast) (MIN)	110.0 V
Warm Up Time to 90% (MIN)	3.0 min
Warm Up Time to 90% (MAX)	4.0 min
Hot Restart Time to 90% (MAX)	40.0 s

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.750 in(146.0 mm)
Nominal Length (NOM)	5.750 in(146.0 mm)
Bulb Diameter (DIA) (NOM)	2.125 in(54.0 mm)
Light Center Length (LCL) (NOM)	3.500 in(88.9 mm)

PRODUCT INFORMATION

Product Code	13252
Description	LU150/MED/ECO
ANSI Code	S55
Standard Package	Case
Standard Package GTIN	10043168132524
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168132527

