

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacor.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

11339 - LU70/MED/ECO

GE Lucalox® High Pressure Sodium B17

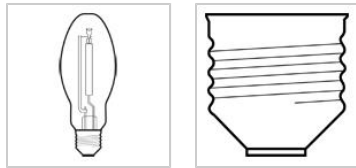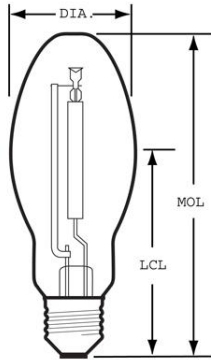

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.
 - Do not use lamp if outer glass is scratched or broken.
 - Wear safety glasses and gloves when handling lamp.

Warning

- Contains sodium – chemical burn risk
 - Avoid skin contact with broken pieces.
- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not store flammable materials near/below lamp.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Use only properly rated ballast.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

GRAPHS & CHARTS

Spectral Power Distribution

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium
Bulb	B17
Base	Medium Screw (E26)
Bulb Finish	Clear
Wattage	70
Rated Life	24000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
LEED-EB MR Credit	105 picograms Hg per mean lumen hour

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	6400
Mean Lumens	5450
Nominal Initial Lumens per Watt	91
Color Temperature	1900 K
Color Rendering Index (CRI)	22
Effective Arc Length	1.06 in

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast)	110 V
Warm Up Time to 90% (MIN)	3 min
Warm Up Time to 90% (MAX)	4 min
Hot Restart Time to 90% (MAX)	0.67 min

DIMENSIONS

Maximum Overall Length (MOL)	5.4300 in(137.9 mm)
Nominal Length	5.430 in(137.9 mm)
Bulb Diameter (DIA)	2.125 in(54.0 mm)
Bulb Diameter (DIA) (MAX)	2.125 in(54.0 mm)
Light Center Length (LCL)	3.430 in(87.1 mm)

PRODUCT INFORMATION

Product Code	11339
Description	LU70/MED/ECO
ANSI Code	S62
Standard Package	Case
Standard Package GTIN	10043168113394
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168113397

