




Model No.	VE226MVHRP-W
Family	Elite
Ballast Type	Electronic
Lamp Operation	Serial
Input Voltage	120/277V
Starting Method	Program Start

PRODUCT SPECIFICATION

ELECTRONIC BALLASTS

Lamp Type	No. of Lamps	Input Voltage (V)	Input Current (A)	Input Power (W)	Power Factor	MAX THD (%)	Ballast Factor	Min. Starting Temp.(F/C)	Lamp Current Crest Factor	B.E.F.
CFQ26W/G24q	1	120/277	0.25/0.11	30	0.98	10	1.00	0	1.7	3.33
CFQ26W/G24q	2	120/277	0.48/0.21	58/56	0.98	10	0.97	0	1.7	1.67/1.73
CFTR26W/GX24q	1	120/277	0.25/0.11	30	0.98	10	1.00	0	1.7	3.33
CFTR26W/GX24q	2	120/277	0.48/0.21	58/56	0.98	10	0.97	0	1.7	1.67/1.73
CFTR32W/GX24q	1	120/277	0.31/0.13	36	0.98	10	0.98	0	1.7	2.72
CFTR42W/GX24q	1	120/277	0.38/0.17	46	0.98	10	0.98	0	1.7	2.33

Physical Parameters

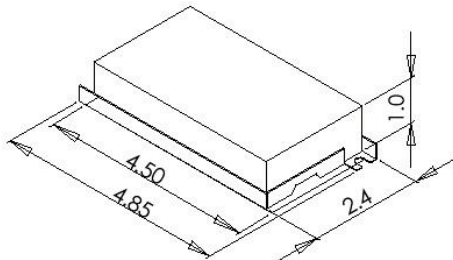

Enclosure	(in)
Length	4.85
Width	2.4
Height	1.0
Mounting	4.50

Lead Length	in.(+/-1.0)
Black	12
White	12
Red	12
Blue	
Yellow	12

Wiring Diagram

